
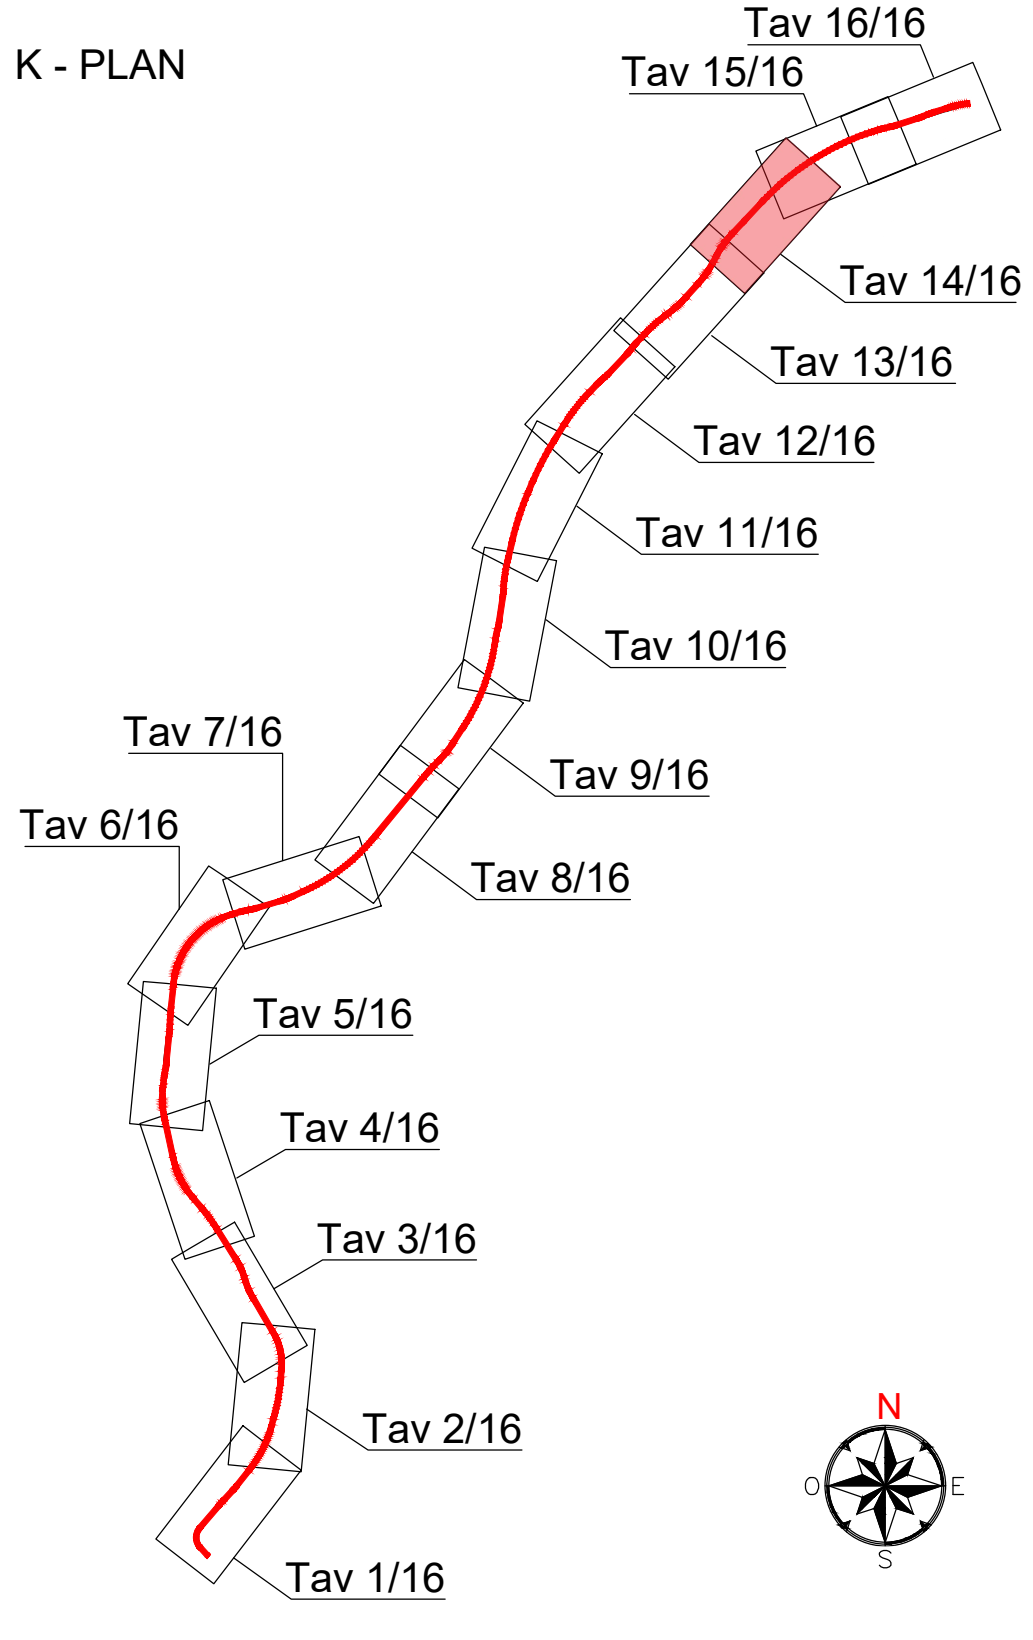


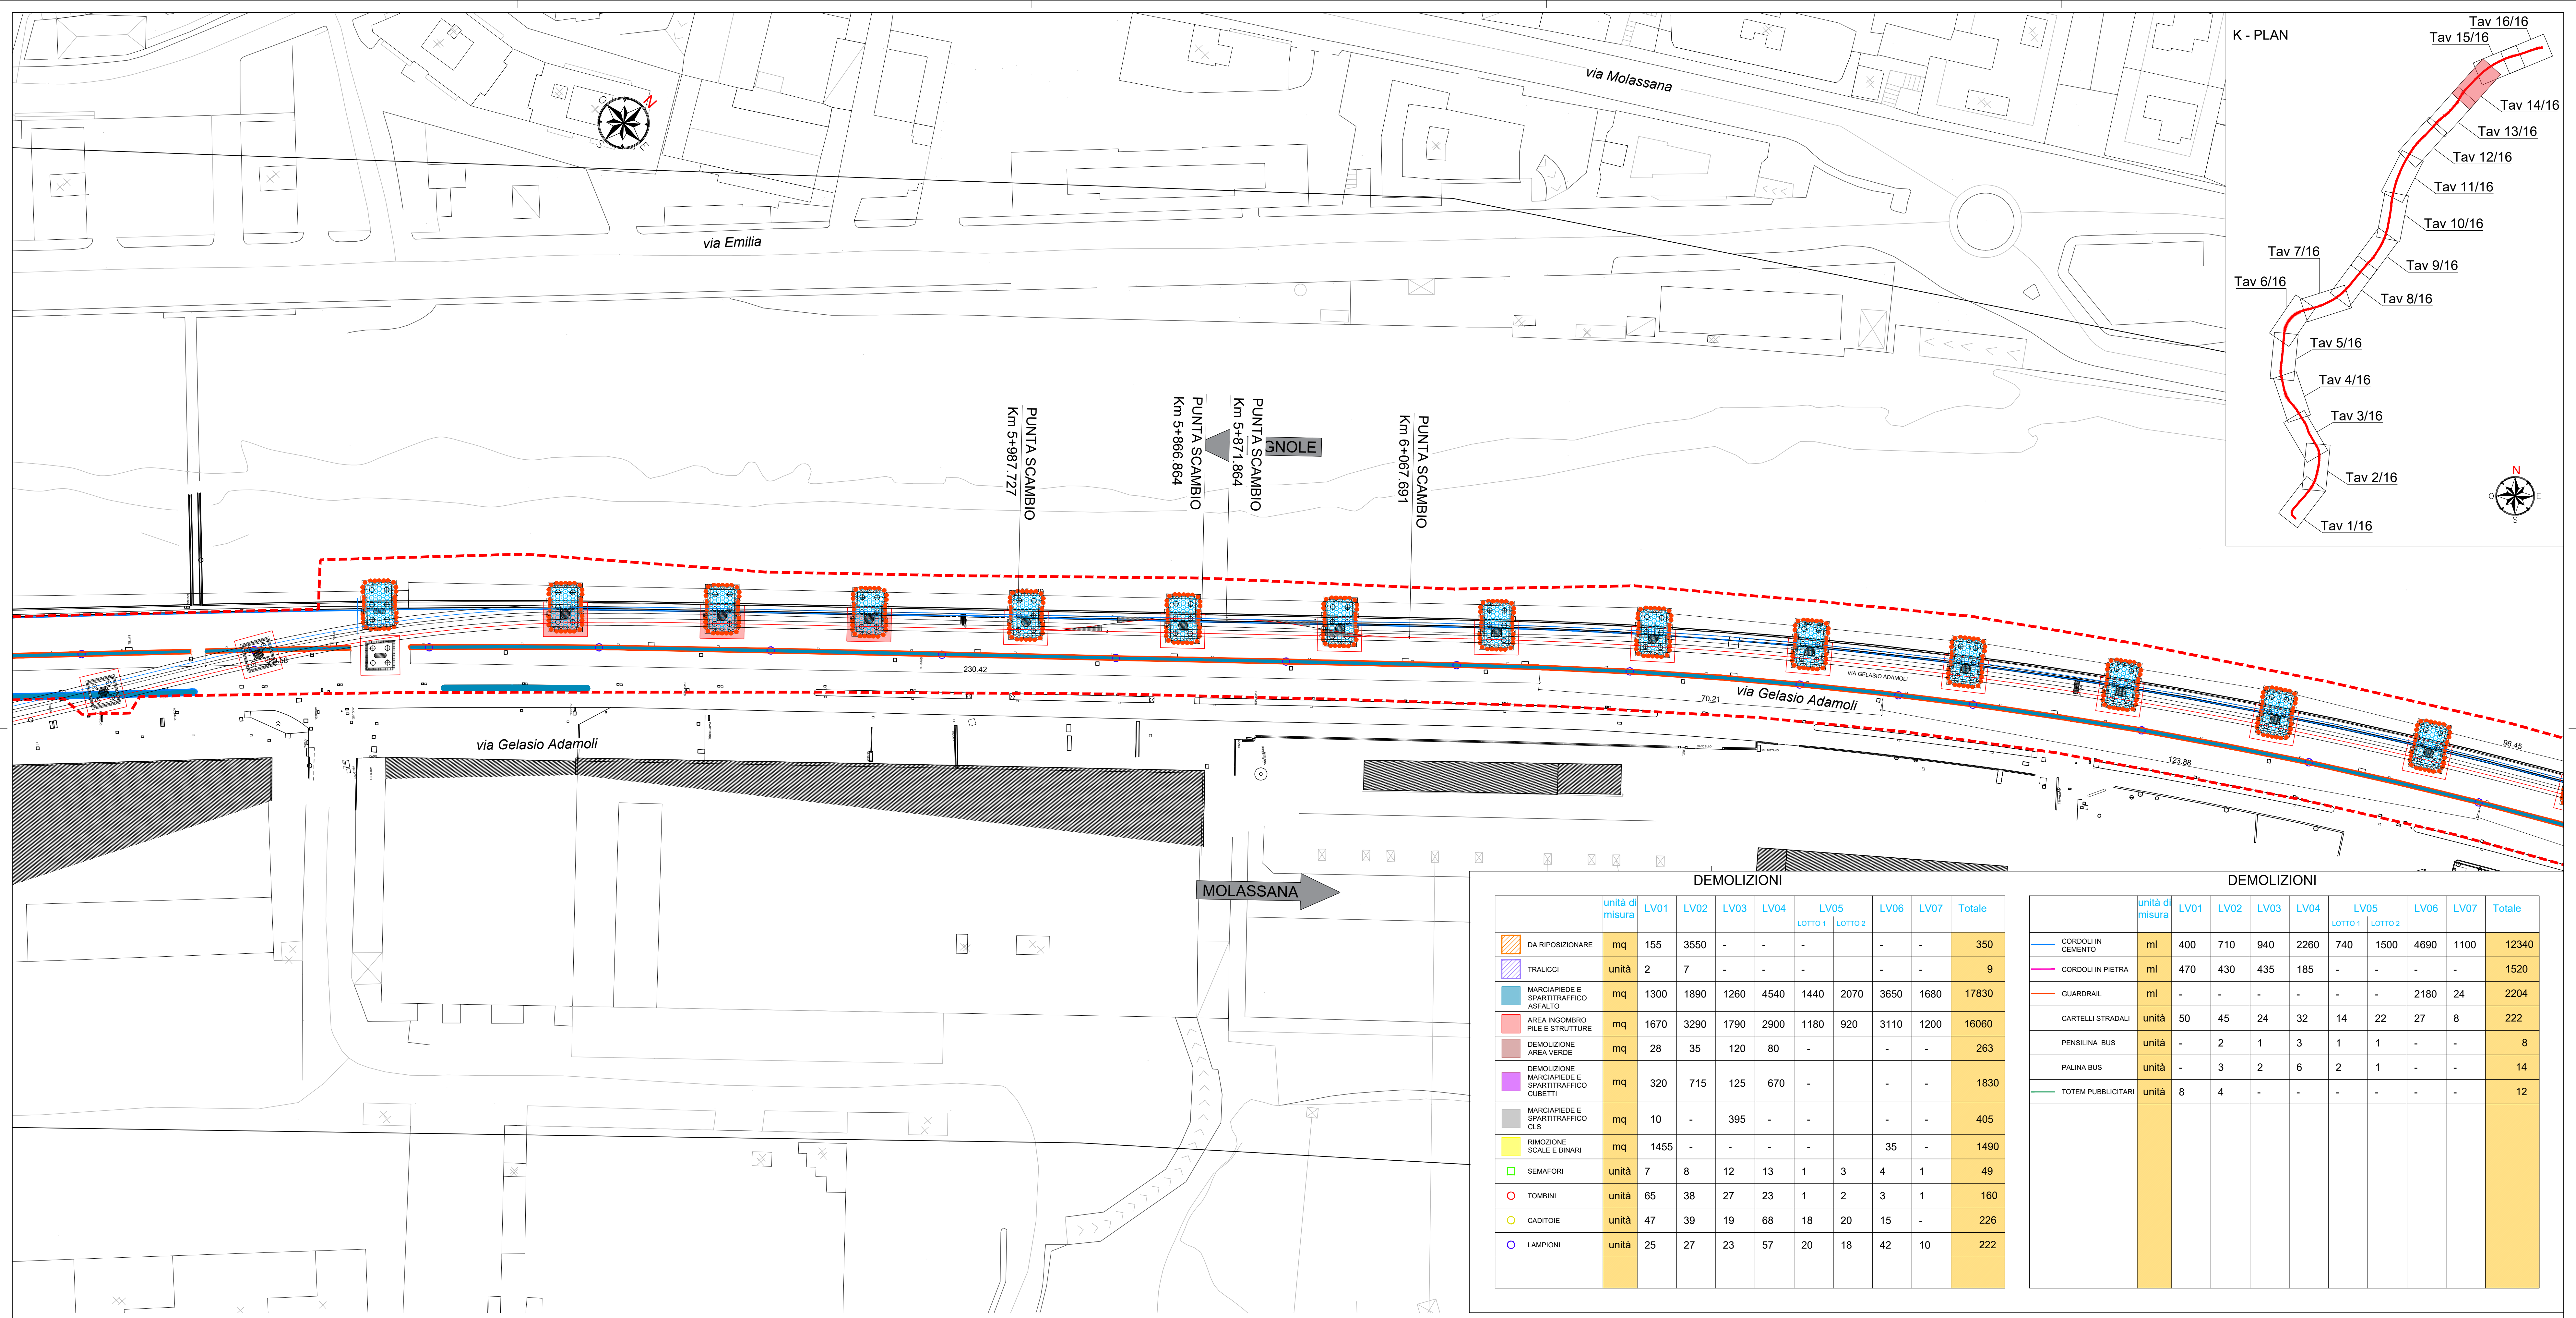

DEMOLIZIONI									
	unità di misura	LV01	LV02	LV03	LV04	LV05	LV06	LV07	Totale
DA RIPOSIZIONARE	mq	155	3550	-	-	-	-	-	350
TRALICCI	unità	2	7	-	-	-	-	-	9
MARCIAPIEDE E SPARTITRAFFICO ASFALTO	mq	1300	1890	1260	4540	1440	2070	3650	17830
AREA INGOMBRO PILE E STRUTTURE	mq	1670	3290	1790	2900	1180	920	3110	16060
DEMOLIZIONE AREA VERDE	mq	28	35	120	80	-	-	-	263
DEMOLIZIONE MARCIAPIEDE E SPARTITRAFFICO CUBETTI	mq	320	715	125	670	-	-	-	1830
MARCIAPIEDE E SPARTITRAFFICO CLS	mq	10	-	395	-	-	-	-	405
RIMOZIONE SCALE E BINARI	mq	1455	-	-	-	-	35	-	1490
SEMAFORI	unità	7	8	12	13	1	3	4	49
TOMBINI	unità	65	38	27	23	1	2	3	160
CADITOIE	unità	47	39	19	68	18	20	15	226
LAMPIONI	unità	25	27	23	57	20	18	42	222

DEMOLIZIONI										
	unità di misura	LV01	LV02	LV03	LV04	LV05 LOTTO 1	LV05 LOTTO 2	LV06	LV07	Totale
 CORDOLI IN CEMENTO	ml	400	710	940	2260	740	1500	4690	1100	12340
 CORDOLI IN PIETRA	ml	470	430	435	185	-	-	-	-	1520
 GUARDRAIL	ml	-	-	-	-	-	-	2180	24	2204
CARTELLI STRADALI	unità	50	45	24	32	14	22	27	8	222
PENSILINA BUS	unità	-	2	1	3	1	1	-	-	8
PALINA BUS	unità	-	3	2	6	2	1	-	-	14
 TOTEM PUBBLICITARI	unità	8	4	-	-	-	-	-	-	12